

# Homogeneous Soliflex Belts Ultimate Hygienic Solutions



# A Win-Win for the Food Industry: Ultimate hygiene and lower total cost of ownership

Ammeraal Beltech offers a wide range of homogeneous belts. With 75 years of experience in the Food Industry, Ammeraal Beltech knows OEM's and End Users are always looking for ways to increase food safety and productivity. That's why we developed the ultimate hygienic conveyor belt range: **Soliflex**.

Soliflex is made from a single piece of homogeneous plastic so it cannot fray and contaminate food. It is also very easy to clean (requiring less water & time).

## The Soliflex range consists of 5 Positive Drive belts.

Our Soliflex Positive Drive belts come in a variety of different teeth and sprocket styles to suit your application. This positive drive system reduces the energy required to run your conveyor. Our Soliflex PRO belt delivers **Ultimate Tracking** and our Soliflex Center Bar belt delivers good tracking; they are thus virtually maintenance free!

The Soliflex range of belts can be installed on existing conveyors and in combination with proper conveyor design allows for **Cleaning and sanitizing in place**.



Soliflex PRO complies with Ammeraal Beltech's **SAFE & CLEAN** concept:

## SAFE

- complying with international Food Grade standards (EC 1935/2004, EU 10/2011 and FDA)
- belt features that support your ISO 22000 requirements (previously HACCP)
- ultimate hygienic belt for food safety

## CLEAN

- easy and fast cleaning and sanitizing of belts
- using less water, detergent and time
- cleaning and sanitizing in motion possible
- cleaning and sanitizing in place possible

## Industries:

- » Meat & Poultry
- » Fish & Seafood
- » Vegetable processing
- » Bakery & Confectionary
- » Dairy








Ammeraal Beltech is member of European Hygienic Engineering & Design Group



Food Grade belts comply with EC 1935/2004 and FDA standards supporting your ISO 22000 requirements (previously HACCP)

# Soliflex Belt Range


There are 5 Soliflex drive systems available. Soliflex PRO, Soliflex PRO mini, Soliflex Center Bar (CB), Soliflex Full Bar (FB), Soliflex Full Bar mini (FB mini). The selection matrix assists to choose the most suitable belt for your application.

Product	Soliflex PRO	Soliflex PRO mini	Soliflex CB	Soliflex FB	Soliflex FB mini
					
Description	Hygienic tracking design	Hygienic tracking design	Hygienic design	Traditional design	Traditional design
Available materials	TPU + TPE	TPU	TPU	TPU	TPU
Shore Hardness	55 shore D	55 shore D	98 shore A	98 shore A	98 shore A
Available thickness	2, 3 and 4 mm	1.5 and 2 mm	3 mm	3.3 mm	2.79 mm
Available belt width	1800	1800	1500	1500	1500
Pitch of lugs/teeth	51.0 mm	25.5 mm	39.7 mm	50 mm	25.9 mm
Min. sprocket dia.	94.7 mm (TPU 2 mm)	47 mm	124 mm	95.5 mm	50.8 mm
Cleanability	++++	++++	++++	+	+
Transmissible torque	+++	+++	++	++	++
F/E values	+++	++	+++	++	++
Trough conveyors	+++	+++	++	+	+
Tracking	++++	++++	+++	+	+
Surface smoothness	+++	+++	++	++	++


## UltraScraper

Metal detectable and antimicrobial scrapers for extended hygiene and efficient food processing.

Food items can stick even to belts with non-stick properties. Thus, scraping and cleaning efficiency and effectiveness are key Food Industry issues.

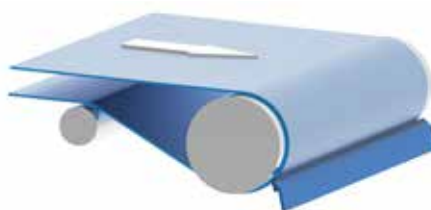

Scraper placement is possible on motordrum and sprocket driven systems.

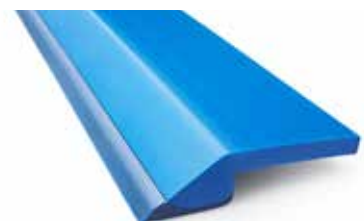

The UltraScraper's Soft Lip enables deep cleaning.

# Self-tracking & customisation

The Soliflex PRO & PRO mini self-tracking system works in two ways:





## 1) By unique sprocket design

The sprocket's centre piece column also supports tracking and positioning. The belt is fixed in position on the drive and return pulley.

## 2) By using the slider bed

Slider bed strips are positioned in such a way that they act as guides for the drive lugs. In this way the belt is self-tracking over the entire slider bed.

## Variable custom lug positioning on Soliflex PRO (mini) belts

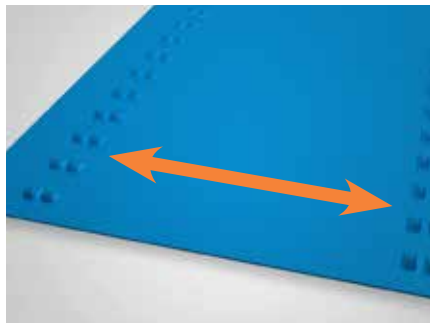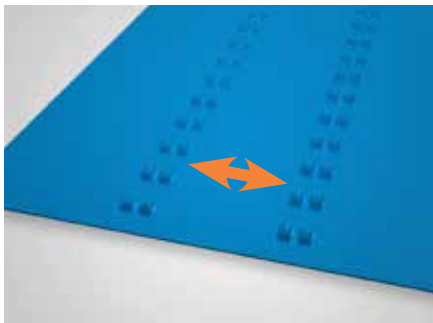

The standard configuration consists of 2 pairs of lugs (Duplex) or 4 pairs of lugs (Quattro) with a pitch of 150 mm.

A variable pitch is also available on request




For special applications such as swan necks, the lugs can be positioned on the edges of the belt allowing full control in the critical bend of the conveyor.

# Fabrication capabilities

Each application and process require their own solution. For the Soliflex range of belts extensive fabrication possibilities are available to suit your needs.

## Cleats

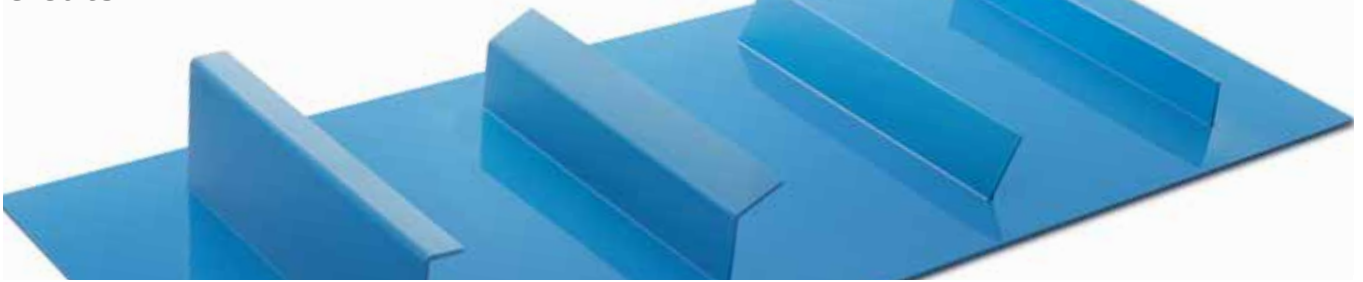


Flat, Angled, Bent all available up to 150 mm high.  
Smooth finish or profiled using the R18 (positive pyramid) or A18 (inverted pyramid).  
Made from TPU and using HF welding technology.

## Sidewalls

Sidewalls are available for Soliflex TPU from 20-100 mm.




Can be combined with cleats to make pockets for product elevation on steep angle or vertical.

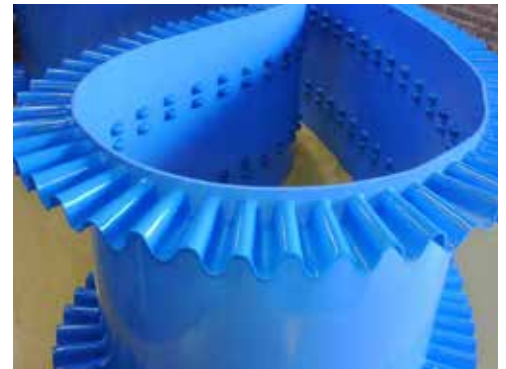

## Endlessing and Joining

For ultimate hygiene an endless spliced belt is recommended. The belt can be joined in our factory or on-site using a butt splice.

Alternately, the belt can be joined using less hygienic plastic or mechanical fasteners. These solutions allow an easy removal of the belt.

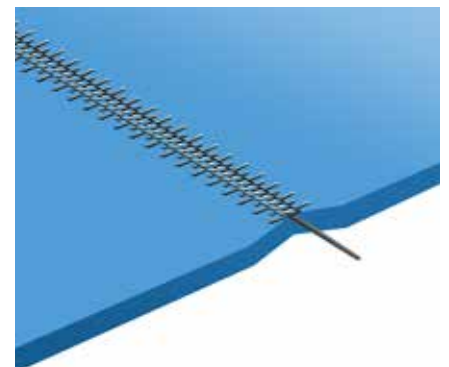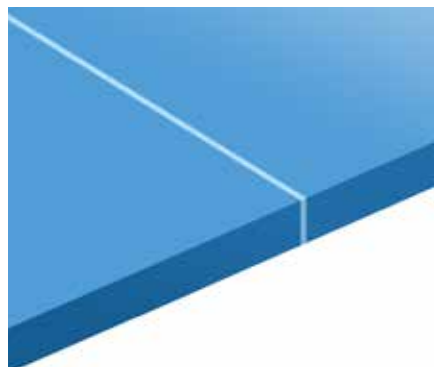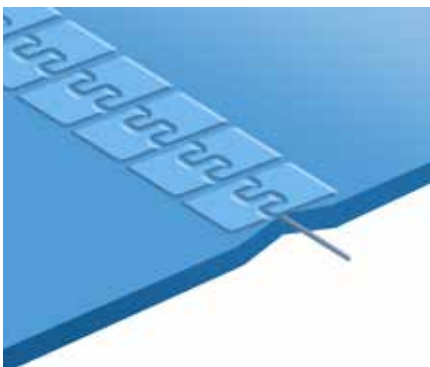

## Local Contacts

... and 150 more service contact points  
at [ammeraalbeltech.com](http://ammeraalbeltech.com)

### Argentina

T +54 11 4218 2906  
info-ar@ammeraalbeltech.com

### Australia

T +61 3 8780 6000  
info-au@ammeraalbeltech.com

### Austria

T +43 171728 133  
info-de@ammeraalbeltech.com

### Belgium

T +32 2 466 03 00  
info-be@ammeraalbeltech.com

### Canada

T +1 905 890 1311  
info-ca@ammeraalbeltech.com

### Chile

T +56 2 233 12900  
info-cl@ammeraalbeltech.com

### China

T +86 512 8287 2709  
info-cn@ammeraalbeltech.com

### Colombia

T +57 893 9890  
info-co@ammeraalbeltech.com

### Czech Republic

T +420 567 117 211  
info-cz@ammeraalbeltech.com

### Denmark

T + 45 7572 3100  
info-dk@ammeraalbeltech.com

### Finland

T +358 207 911 400  
info-fi@ammeraalbeltech.com

### France

T +33 3 20 90 36 00  
info-fr@ammeraalbeltech.com

### Germany

T +49 4152 937-0  
info-de@ammeraalbeltech.com

### Hungary

T +36 30 311 6099  
info-hu@ammeraalbeltech.com

### India

T +91 44 265 34 244  
info-in@ammeraalbeltech.com

### Israel

T +972 4 6371485  
info-il@ammeraalbeltech.com

### Italy

T +39 051 660 60 06  
info-it@ammeraalbeltech.com

### Japan

T +81 52 433 7400  
info-jp@ammeraalbeltech.com

### Luxembourg

T +352 26 48 38 56  
info-lu@ammeraalbeltech.com

### Malaysia

T +60 3 806 188 49  
info-my@ammeraalbeltech.com

### Mexico

T +52 55 5341 8131  
info-mx@ammeraalbeltech.com

### Netherlands

T +31 72 57 51212  
info-nl@ammeraalbeltech.com

### Poland

T +48 32 44 77 179  
info-pl@ammeraalbeltech.com

### Portugal

T +351 22 947 94 40  
info-pt@ammeraalbeltech.com

### Singapore

T +65 62739767  
info-sg@ammeraalbeltech.com

### Slovakia

T +421 255648542  
info-sk@ammeraalbeltech.com

### South Korea

T +82 31 448 3613-7  
info-kr@ammeraalbeltech.com

### Spain

T +34 93 718 3054  
info-es@ammeraalbeltech.com

### Sweden

T +46 (0) 10 130 96 00  
info-se@ammeraalbeltech.com

### Switzerland

T +41 55 2253 535  
info-ch@ammeraalbeltech.com

### Thailand

T +66 2 902 2604-13  
info-th@ammeraalbeltech.com

### Turkey

T +90 232 877 0700  
info-tr@ammeraalbeltech.com

### United Kingdom

T +44 1992 500550  
info-uk@ammeraalbeltech.com


### United States

T +1 847 673 6720  
info-us@ammeraalbeltech.com

### Vietnam

T +84 8 376 562 05  
info-vn@ammeraalbeltech.com

**Expert advice, quality solutions  
and local service  
for all your belting needs**

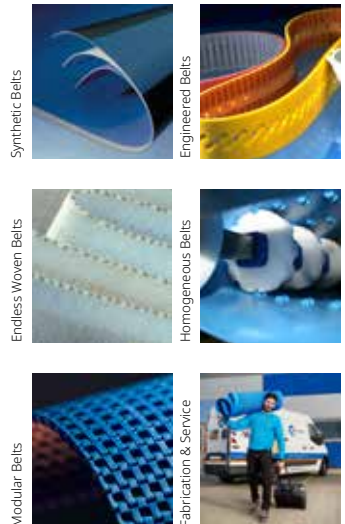

### General contact information:

**Ammeraal Beltech**  
P.O. Box 38  
1700 AA Heerhugowaard  
The Netherlands

T +31 (0)72 575 1212  
info@ammeraalbeltech.com

**ammera.com**